

Widest range of epoxy and cementitious tile joint filler in 46 attractive colors

# SAINT-GOBAIN

### weber.color fine

#### Product Description:

weber.color fine is a polymer modified cementitious tile grout used for internal and external application.

#### **Key Features:**

- Polymer modified cementitious joint filler, used in both interior & exterior applications.
- Recommended for use on tile joints of 1-6mm width, superior to white cement, no shrinkage cracks.
- It is suitable for grouting ceramic tiles vitrified tiles, marble, granites, mosaics and natural stone in walls and floors.

Pack size: 500 g, 1 kg, 30 kg

or: Available in 24 shades

### weber.color dewdrop

### Product Description:

weber.color dewdrop is a higher polymer modified cementitious water repellant tile grout used for internal and external application.

### **Key Features:**


- Cementitious based water repellant tile grout used for both internal and external application.
- Water repellent in nature reduces seepage and maintain hygienic conditions.
- It is suitable for grouting ceramic tiles vitrified tiles, marble, granites, mosaics and natural stone in walls and floors.

Pack size: 500 g, 1 kg, 30 kg

Consumption depends on tile size and joint width

Tile size in mm	300X300	450x450	600x600	800x800
Tile size in inches	12x12	18x18	24x24	32x32
Thickness in mm	6	7	8	9
oint width		cons	sumptionii	n kg/sqm
2 mm	0.15	0.12	0.10	0.09
3 mm	0.23	0.18	0.15	0.13
5 mm	0.36	0.30	0.25	0.21









Scan QR code for more details



### weber epoxy systems

### Product Description:

Weber epoxy system is 100% solid, reaction resin based, impervious epoxy grout suitable for applications on all types of tiles and stones. When mixed as per instructions, it forms to a smooth, creamy easy-to-apply consistency. It also recommended for hygiene sensitive areas requiring sterile conditions, stain and chemical resistance.





### **Key Features:**

- Easy-to-use with superior workability & water clean ability.
- Non sagging properties for ease of application on walls & floors.
- Ressistance to stains & chemicals.
- Very low water absorption.
- Early flexural properties.
- For grout joints between 2mm-14mm.
- High resistance to abrasion.
- High compressive strength.
- Very low shrinkage exceeding international standards.
- Hygienic in service & would not support bacterial growth.
- Low VOC-Over curing full reaction takes place.

System	weber.joint poxy Resin & Hardener	weber.joint poxyfill Filler
1.1 kg	300g bucket (200g resin and 100g hardener)	800g pouch (filler) 1 carton = 800g pouch x 4 units
5.5 kg	1.5kg bucket (1kg resin and 500g hardener) 1 carton = 1kg resin x 4 units and 500g hardener x 4 units	4kg pouch (filler) 1 carton = 4kg pouch x 2 units
22 kg	1.5kg bucket (1kg resin and 500g hardener) 1 carton = 1kg resin x 4 units and 500g hardener x 4 units	4kg pouch (filler) 1 carton = 4kg pouch x 2 units

Gro	ut consu	umption	in kg/m	2						
Size of tile in mm (length x	Joint width in mm									
breath x thickness in mm)	2	3	4	5	7	10				
300 x 300 x 8	0.18	0.28	0.37	0.46	0.64	0.92				
300 x 300 x 10	0.23	0.34	0.46	0.57	0.80	1.15				
300 x 450 x 10	0.19	0.29	0.38	0.48	0.67	0.96				
300 x 450 x 12	0.23	0.34	0.46	0.57	0.80	1.15				
400 x 400 x 10	0.17	0.26	0.34	0.43	0.60	0.86				
400 x 400 x 12	0.21	0.31	0.41	0.52	0.72	1.03				
600 x 600 x 10	0.11	0.17	0.23	0.29	0.40	0.57				
600 x 600 x 12	0.14	0.21	0.28	0.34	0.48	0.69				

Theoretical coverage calculation: in Kg / sqmtr (tile length + tile breath) x tile thickness x joint width x wet density (tile length + joint width) x (tile breath + joint width)

## weber groutadd


### Product Description:


weber groutadd is a blend of polymeric emulsion to be added in weber cementitious grout to enhance the strength and durabilityof the grout when applied between tile and stone in internal and external areas under wet and dry conditions on wall an floors.

### **Key Features:**

- Enhances compressive strength of cementitious grout.
- Weber groutadd mixed with weber cementitious grout can be used in joints between 1-8 mm.
- Improves performance of cementitious grouts, enhancing compressive strength, flexibility, crack resistance & water tightness, while reducing shrinkage.

Pack size: 350 mL and 20 L pack

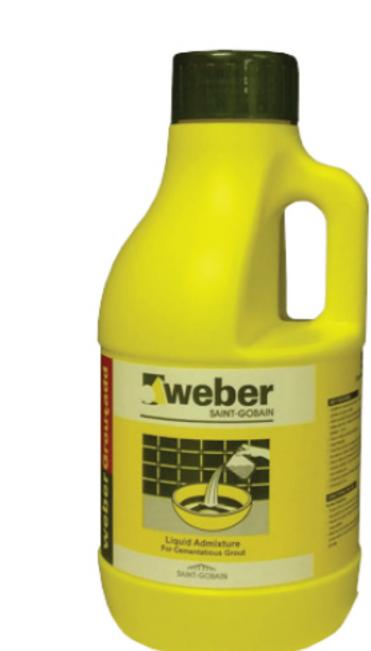





## weber knight armor

### Product Description:

**Key Features:** 

weber knight armor is a two component, high performance 100% solid epoxy based tile/stone joint filler which provides photo luminescence during dark. It can absorb natural or house hold light and provide luminescence in darkness when placed between tiles and stones.



 300 Lux for 1 hour will give photoluminescence for 5-8 hours.

placed between tiles and stones.

Pack size: 1 kg, 5 kg

Color: Available in 2 colors

### weber shine armor

### Product Description:

weber shine armor is a two component, 100% solid, glitter based reaction resin epoxy grout which is acid resistant. The glitter component is premixed with the resin base which results into a consistent, uniform and highly aesthetically finished joints after application.

### **Key Features:**

 Premixed epoxy glitter results in consistent and highly aesthetic finished joints.

Pack size: 1 kg, 5 kg

Color: Available in 3 colors

## weber pearl armor

### Product Description:

weber pearl armor is a two component, high performance 100% solid epoxy based tile/stone filler which allows light to pass through the grout itself to create an unique reflective appearance.

#### Key Features:

- Allows light to pass through the grout itself to create an unique reflective appearance.
- To be used with tiles which require a neutral colour grout.

Pack size: 1 kg, 5 kg

Color: Translucent



weber



21 Crimson	(e) 22 Terracotta	(°) 23 Jaisalmer	(°) 24 Mushroom				 		 		40 Royal Blue
											20 Chocolate (•)

# complete product range, directly from your smartphone.

Scan QR code to download android

product

in.weber/weberapp Health & safety: Use of gloves and goggles is recommended. Any splashes to the skin or eyes should be washed off with clean water. In the event of prolonged irritation,


Disclamer: Grout Shades are approximate guide only, actual shade and texture will

depend on jobsite conditions. User are advised to undertake a trial for

product suitability prior to its full scale usage. There is no express or implied guarantee / warranty for the results. The company is not liable for any consequential damages.

Saint-Gobain India Pvt. Ltd. - Weber Business

5th Level, Leela Business Park, Andheri-Kurla Road,

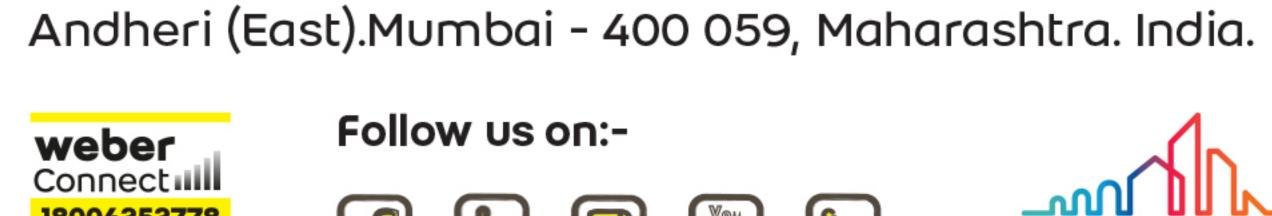

medical advice should be sought.












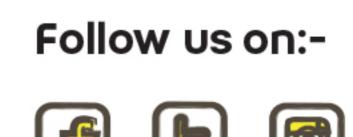





 It is advisable to mix grout from different batches to get uniform color

Grout shades are approximate guide only

Actual shade and texture will depend on job

Important notes:-

- Cementitious grout are available in ( ) shades
- weber light armor series is available in 6 special effect color shades
- Rest all shades are available in weber.joint poxy + weber.joint poxyfill system